


MODEL	POWER		VOLTAGE	FREQUENCY	POWER FACTOR	CURRENT
	PRIME	STAND BY				
MP-10EM	8 Kw / 8 KVA	9 Kw / 9 KVA	240V	60Hz	1.0	38 A



SILENT GENERATOR SET

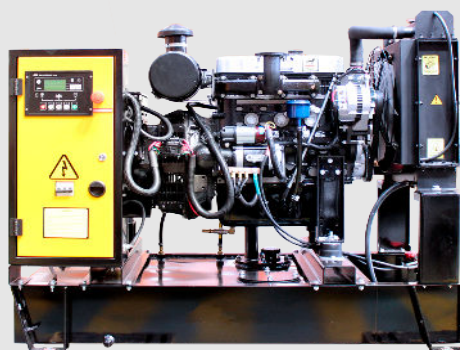

OPEN GENERATOR SET

* Note: All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.

Specifications

Generator Set

Model	MP-10EM	
Engine	PERKINS 403D-11G Tier 4 interim	
Alternator	STAMFORD SOL1-L1	
Control Panel	Electronic	
Phases	Single-phase	
Fuel Tank	Open: 11 Gallons / Silent: 25 Gallons	
Electric System	12V.	
Frequency	60Hz	50Hz
Cooling Fan Air flow	35 m ³ /min	26 m ³ /min
Combustion Air flow	0.9 m ³ /min	0.7 m ³ /min
Exhaust Gas flow	2.4 m ³ /min	1.8 m ³ /min
Exhaust Gas temperature	515°C	420°C

Silent Genset Noise Level @ 7m	Maximum	Ambient
	65 +/- 2 dBA	56 dBA

Engine

Number of Cylinders	3 in-line
Governor Type	Mechanical
Cycle	4-Stroke
Aspiration	Naturally aspirated
Fuel	Diesel
Combustion System	Indirect Injection
Cooling Method	Water Cooled
Bore	77.0 mm
Stroke	81.0 mm
Displacement	1131cc
Compression Ratio	23:1
Lubrication Sys. Capacity	4.9 liters
Cooling Sys. Capacity	5.2 liters

Fuel Consumption

Engine Speed	1800 RPM l/hr	1500 RPM l/hr
Stand-by Power (2)	3.6	2.9
Prime Power (1)	3.0	2.6
75% Prime Power (1)	2.3	2.0
50% Prime Power (1)	1.7	1.5

Alternator

Insulation System	Class "H"
Exciter Type	Self exciter
Voltage Regulation Card	AS540 ± 1.0%
Protection Class	IP 23

Technical Standards


Engine :	ISO 3046, BS 5514, DIN 6271
Alternator :	IEC EN 60034, BS 5000, IEC 34 VDE 0530, NEMA MG1-32 CSA C22.2-100, ASI 1359
Generator Set :	ISO 8528, ISO 9001:2015

(1) Prime Power: Available power under variable load for unlimited hours per year (ISO8528-1). Allows 10% power surge for one hour, every 12 hours.
(2) Standby Power: Available power under variable load, whenever the commercial network breaks down. Does not accept surges (ISO8528-3); it has 500 hours usage limit per year or 300 continuous hours instead.



Dimensions

Dimensions and Weight	a	b	c	Weight	Exh. Ø
	1395 mm	664 mm	1018 mm	340 Kg	2"
	x	y	z	Weight	Exh. Ø
	1760 mm	939 mm	1191 mm	790 Kg	2.5"

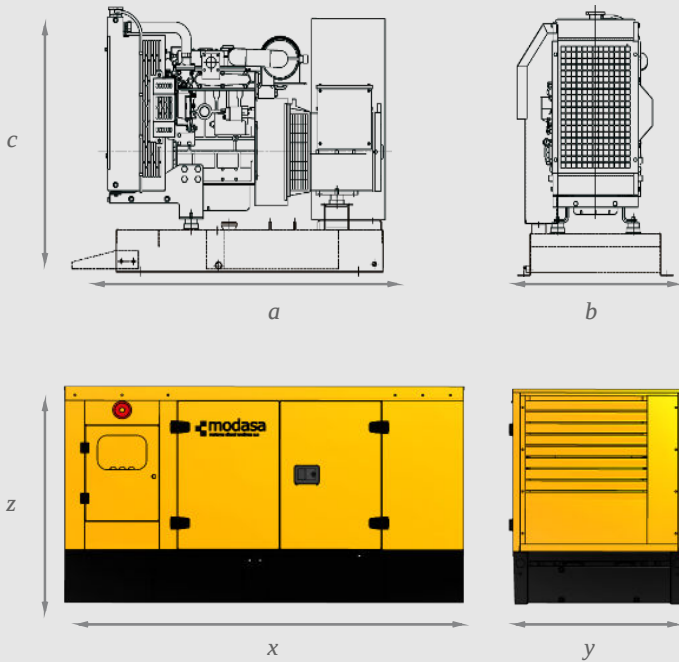

Control Panel



Outfitted with the most recent age electronic digital control panel, it allows starting, controlling, protecting and stopping the generator set in manual and automatic modes. Performs automatic transfer.

Measurements shown with alpha-numeric characters on the digital display:

- Voltage of the three phases L - L y L - N.
- Current of the three phases L1, L2, L3.
- Frequency.
- Rotation speed.
- Battery voltage.
- Working time.
- Oil pressure.
- Cooling temperature.

Optional Enhancements

- Residential muffler. (included in Silent Genset)
- Monoblock water heater.
- Alternator dehumidifying resistance.
- Electronic governance.
- Automatic transfer board.
- Various voltages.
- Remote speed/voltage potentiometer.
- Fuel level electric meter.

Protection:

- Starter failure.
- Stop failure.
- Low oil pressure.
- High engine temperature.
- Low / High frequency
- Low / High generator voltage.
- Low / High battery voltage.
- Emergency stop.
- Overload fault.
- CAN diagnosis.

M: Modasa / P: PERKINS Engine / 10: Genset Power Reference / Q: 50 Hz 1500 RPM / I: Silent / M: Single-phase / E: EPA Tier