


MODEL	POWER		VOLTAGE	FREQUENCY	POWER FACTOR	CURRENT
	PRIME	STAND BY				
UQMP-45	40 Kw/50 KVA	44 Kw/55 KVA	208V	60Hz	0.8	153 A
UQMP-45	42 Kw/53 KVA	45 Kw/56 KVA	440V	60Hz	0.8	74 A
UQMP-45	44 Kw/55 KVA	48 Kw/60 KVA	480V	60Hz	0.8	72 A



SILENT GENERATOR SET

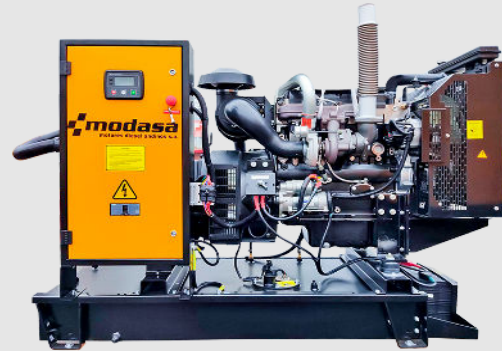

OPEN GENERATOR SET

\* Note: All pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.

## Specifications

### Generator Set

Model	UQMP-45
Engine	PERKINS 1104D-44TG1 EPA Tier 3
Alternator	STAMFORD UCI 224C
Control Panel	Electronic
Phases	Three-phase
Fuel Tank	Open: 41 Gallons / Silent: 49 Gallons
Electric System	12V.
Frequency	60Hz
Cooling Fan Air flow	98 m3/min
Combustion Air flow	5.9 m3/min
Exhaust Gas flow	13.7 m3/min
Exhaust Gas temperature	571°C

Genset Noise Level	Maximum	Ambient
Silent @ 7m	66 +/- 2 dBA	56 dBA

### Engine

Number of Cylinders	4 in-line
Governor Type	Mechanical
Cycle	4-Stroke
Aspiration	Turbocharger
Fuel	Diesel
Combustion System	Direct injection
Cooling Method	Water Cooled
Bore	105.0 mm
Stroke	127.0 mm
Displacement	4410cc
Compression Ratio	18.2:1
Lubrication Sys. Capacity	8.4 liters
Cooling Sys. Capacity	16.5 liters

### Fuel Consumption

Engine Speed	1800 RPM l/hr
Stand-by Power (2)	18.70
Prime Power (1)	16.60
75% Prime Power (1)	12.80
50% Prime Power (1)	9.0

### Alternator

Insulation System	Class "H"
Exciter Type	Self exciter
Voltage Regulation Card	SX460 ± 1.0%
Protection Class	IP 23

### Technical Standards

Engine :	ISO 3046, BS 5514, DIN 6271
Alternator :	IEC EN 60034, BS 5000, IEC 34
	VDE 0530, NEMA MG1-32
	CSAC22, 2-100, ASI 1359
Generator Set :	ISO 8528, ISO 9001:2015


(1) Prime Power: Available power under variable load for unlimited hours per year (ISO8528-1). Allows 10% power surge for one hour, every 12 hours.

(2) Standby Power: Available power under variable load, whenever the commercial network breaks down. Does not accept surges (ISO8528-3); it has 500 hours usage limit per year or 300 continuous hours instead.



## Dimensions

Dimensions and Weights	a	b	c	Weight	Exh. Ø
	1824 mm	814 mm	1365 mm	884 kg	2.5"
	x	y	z	Weight	Exh. Ø
	2660 mm	1089 mm	1469 mm	1244 kg	3"

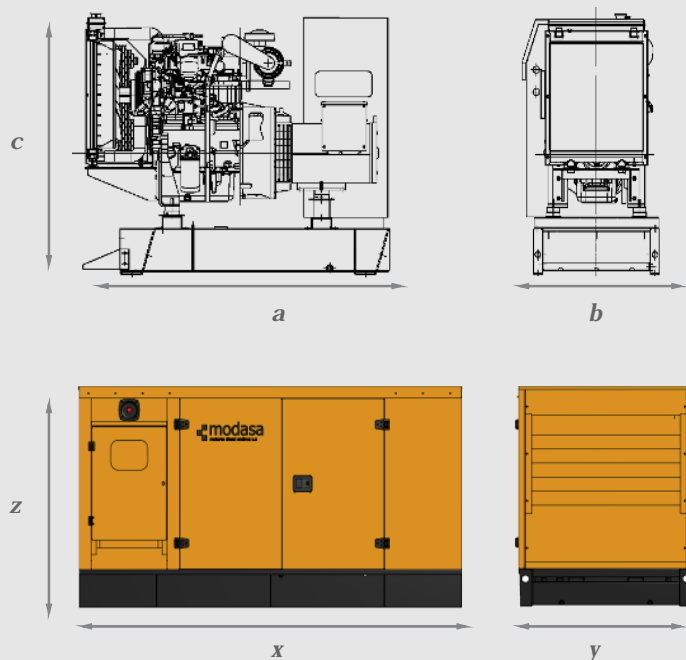

## Control Panel



Outfitted with the most recent age electronic digital control panel, it allows starting, controlling, protecting and stopping the generator set in manual and automatic modes. Performs automatic transfer.

Measurements shown with alpha-numeric characters on the digital display:

- Voltage of the three phases L - L y L - N.
- Current of the three phases L1, L2, L3.
- Frequency.
- Rotation speed.
- Battery voltage.
- Working time.
- Oil pressure.
- Cooling temperature.

## Optional Enhancements

- Residential muffler. (included in Silent Genset)
- Monoblock water heater.
- Alternator dehumidifying resistance.
- Automatic transfer board.
- Variety of voltages.
- Remote speed/voltage potentiometer.
- Fuel level electric meter.

### Protection:

- Starter failure.
- Stop failure.
- Low oil pressure.
- High engine temperature.
- Low / High frequency.
- Low / High generator voltage.
- Low / High battery voltage.
- Emergency stop.
- Overload fault.
- CAN diagnosis.

M: Modasa / P: PERKINS Engine / 45: Genset Power Reference / Q: 50 Hz 1500 RPM / I: Silent / M: Single-phase / E: EPA Tier

Local Sales: (+51-1) 615-8500 Annex 204 Sales  
 International Sales: (+51-1) 615-8500 Annex 283  
 Main Office: Av. Los Frutales 329 - Ate  
 Plant: Old South Panamericana Km 38.2 - Lurín  
[www.modasa.com.pe](http://www.modasa.com.pe)

